


**PARALLEL ARM INSTALLATION FOR CLOCKWISE OPENING DOOR
FOR ANTI CLOCKWISE OPENING DOOR SEE THE BACK PAGE**
This template covers regular parallel arm installations to 180° openings.

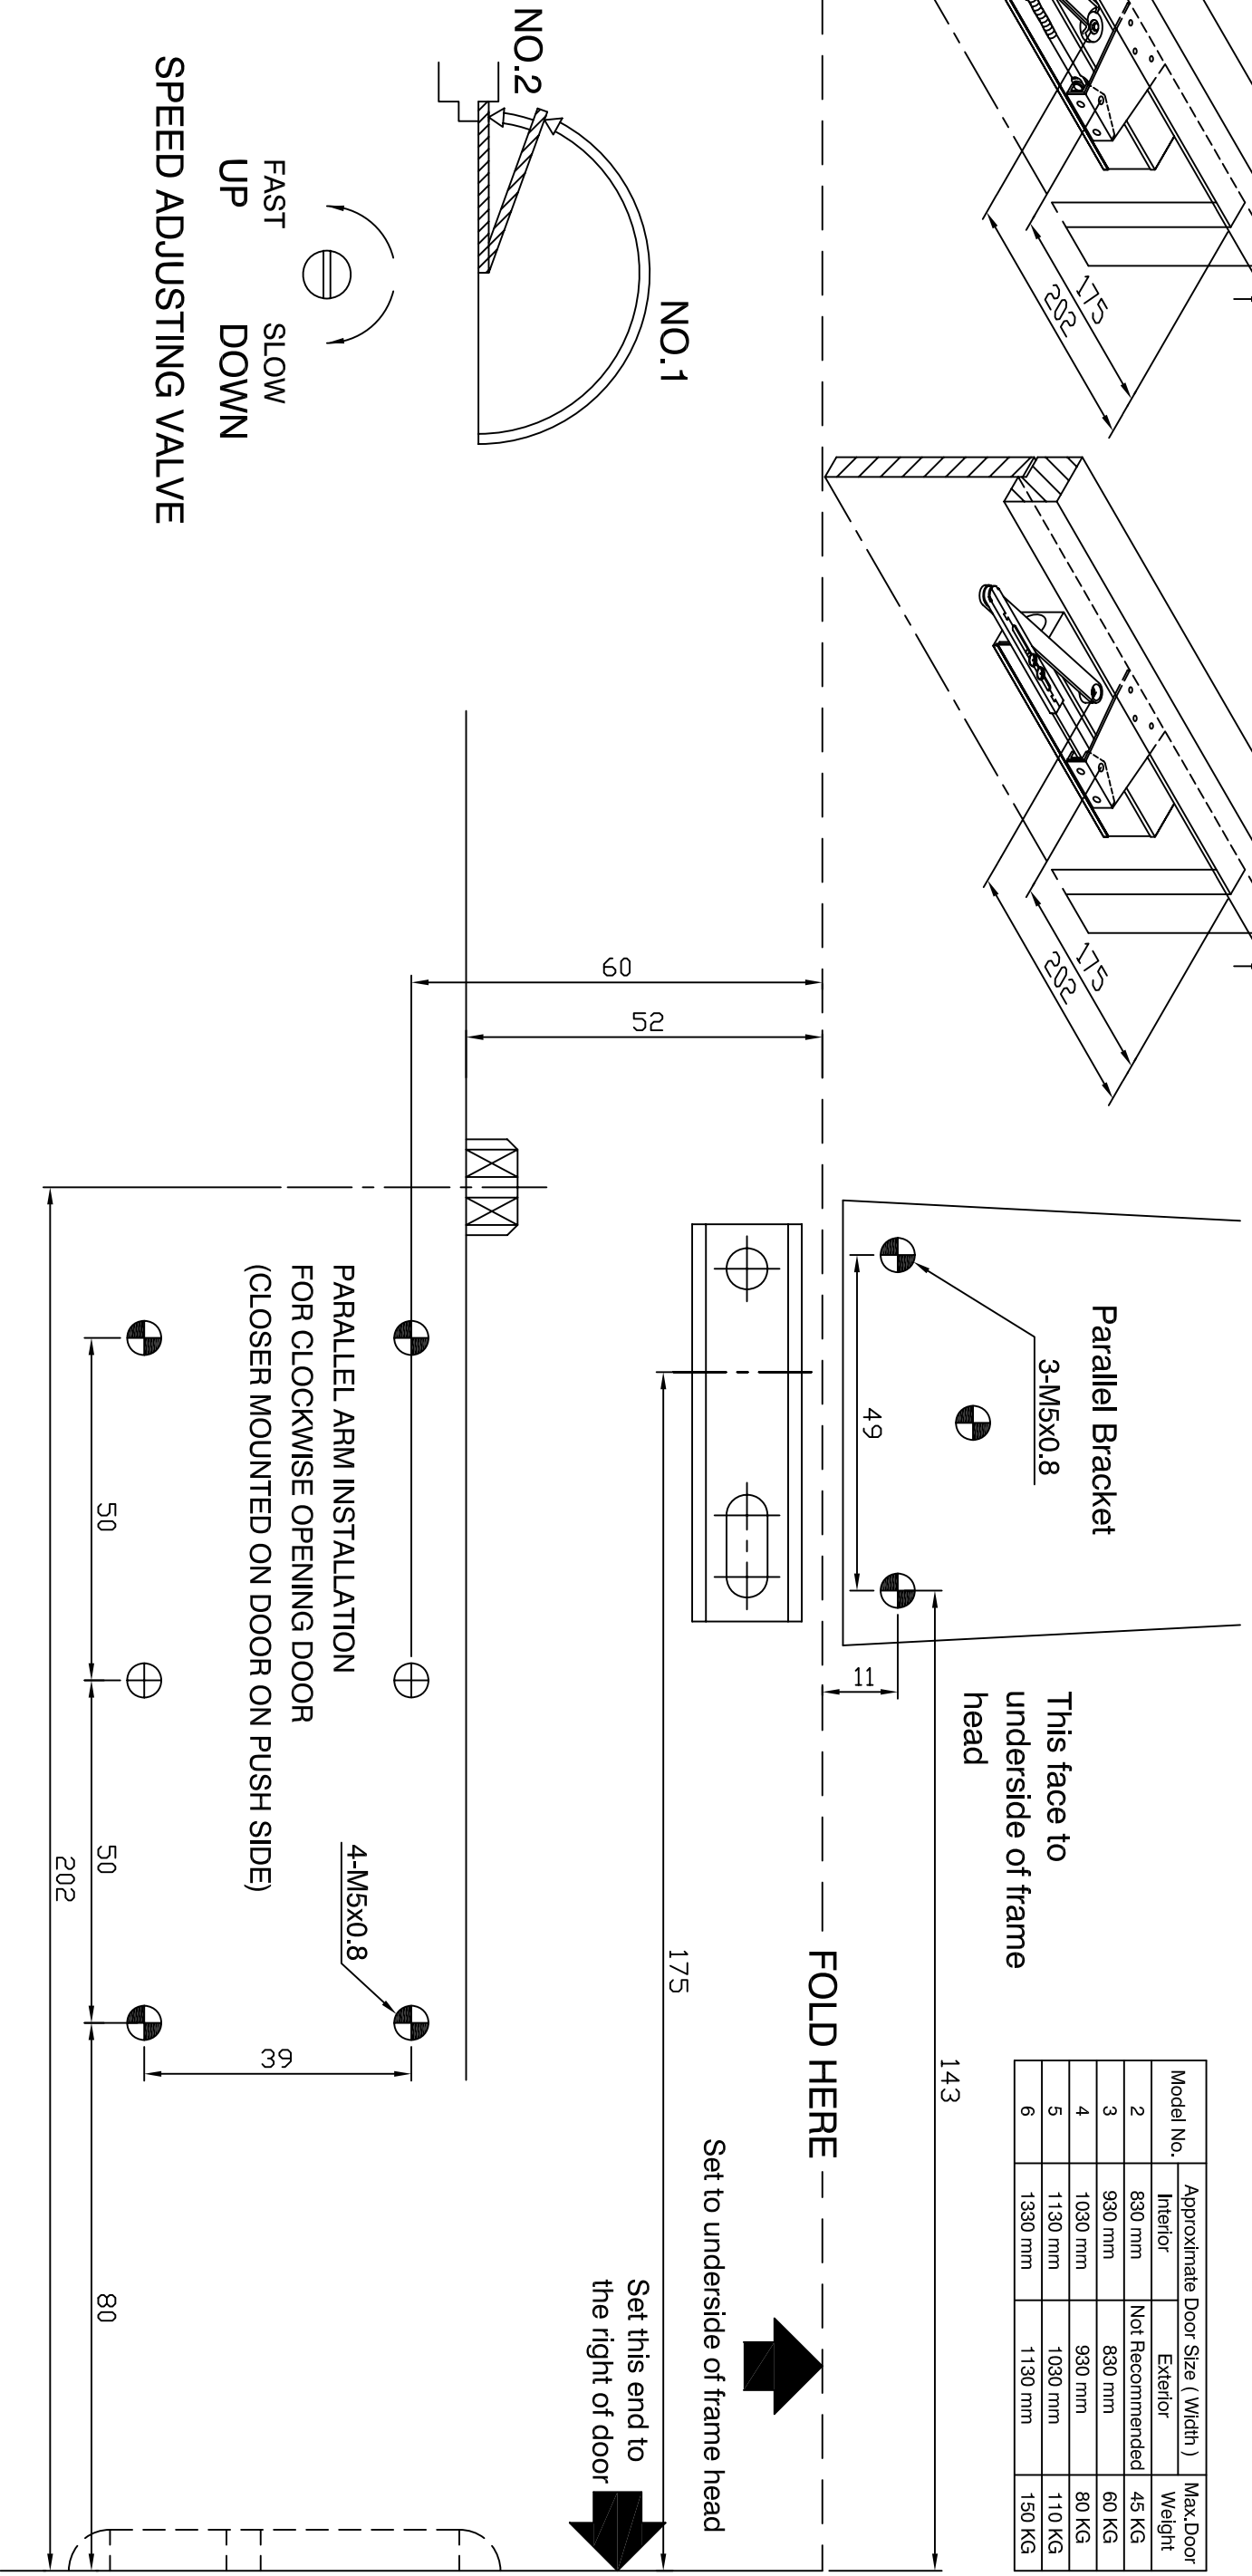

Model No.	Approximate Door Size (Width)	Max. Door Weight
2	Interior 830 mm	45 KG
3	930 mm	60 KG
4	1030 mm	80 KG
5	1130 mm	110 KG
6	1330 mm	150 KG

This face to underside of frame head


FOLD HERE

Set to underside of frame head

Set this end to the right of door

PARALLEL ARM INSTALLATION FOR CLOCKWISE OPENING DOOR (CLOSER MOUNTED ON DOOR ON PUSH SIDE)




SPEED ADJUSTING VALVE



PARALLEL ARM INSTALLATION FOR ANTI CLOCKWISE OPENING DOOR FOR CLOCKWISE OPENING DOOR SEE THE BACK PAGE

This template covers regular parallel arm installations to 180° openings.

Model No.	Approximate Door Size (Width)		Max. Door Weight
	Interior	Exterior	
2	830 mm	Not Recommended	45 KG
3	930 mm	830 mm	60 KG
4	1030 mm	930 mm	80 KG
5	1130 mm	1030 mm	110 KG
6	1330 mm	1130 mm	150 KG

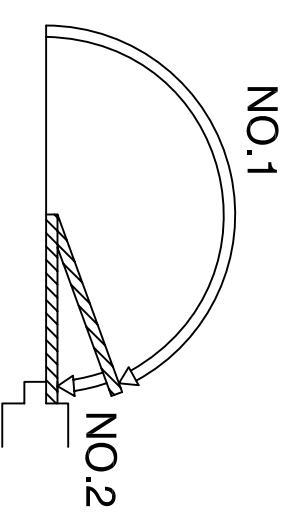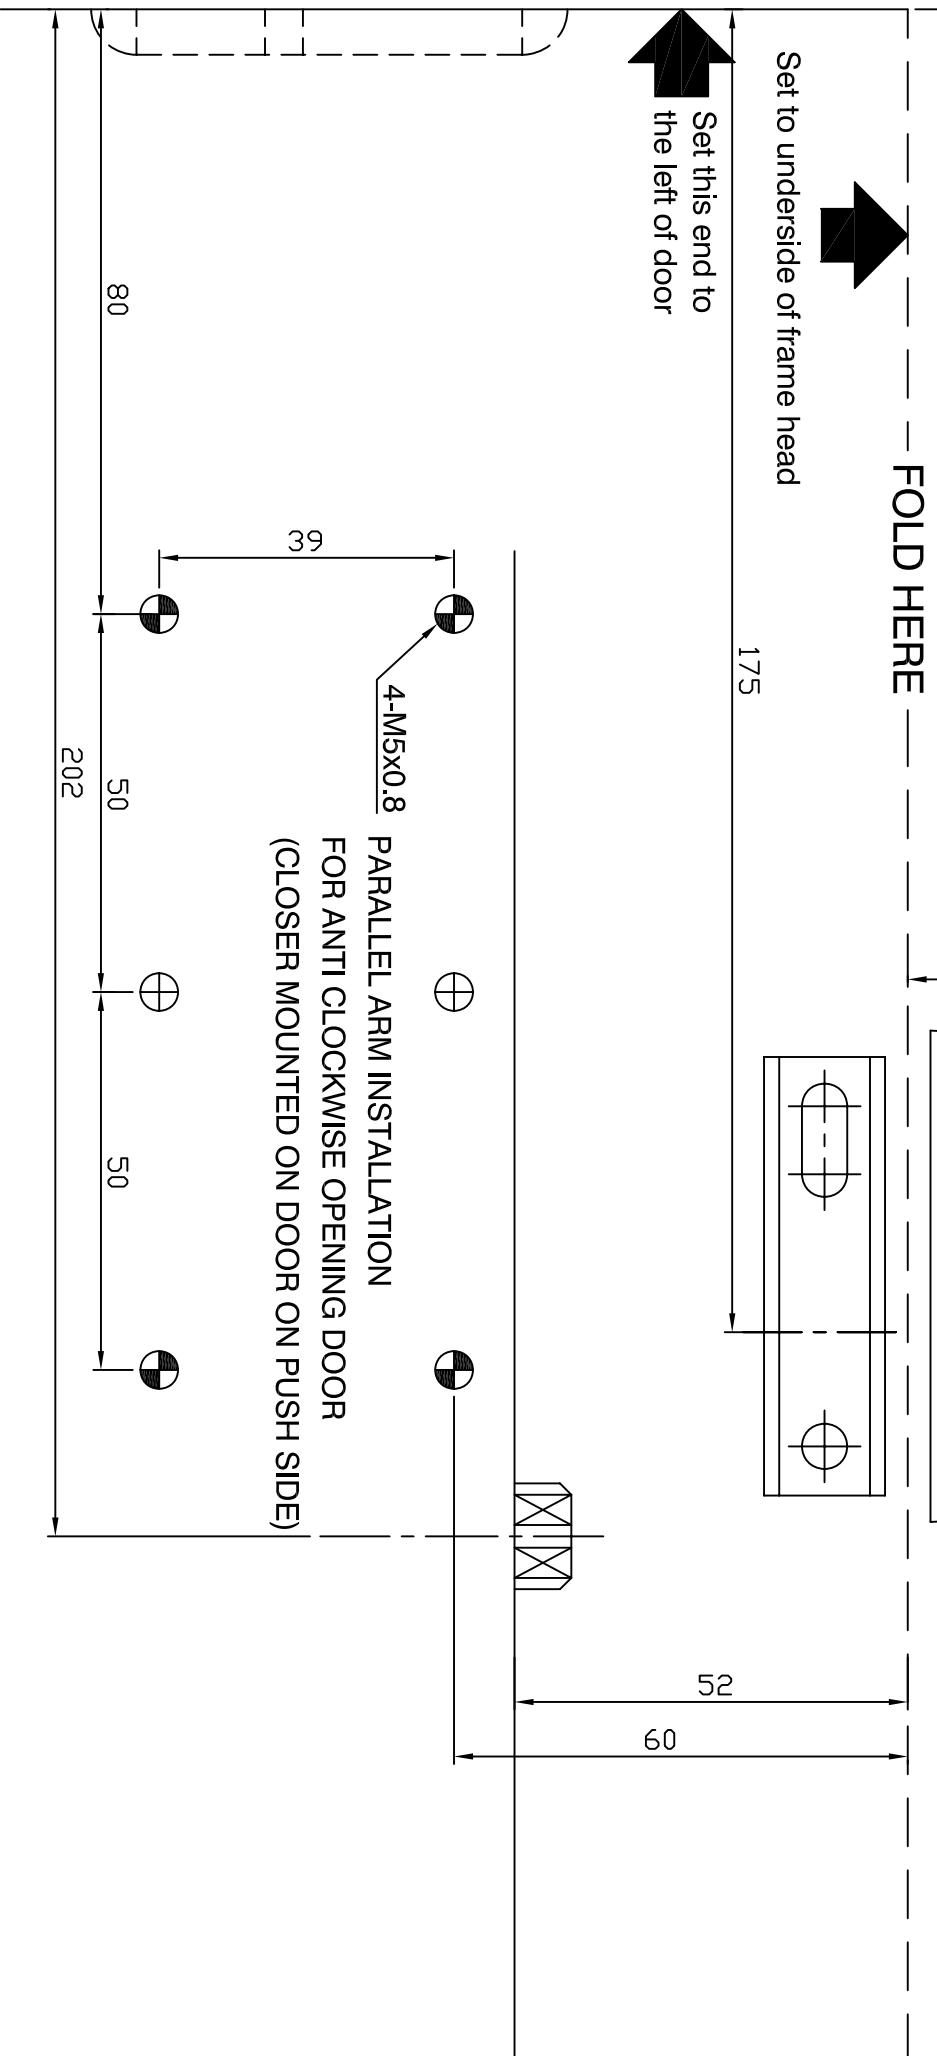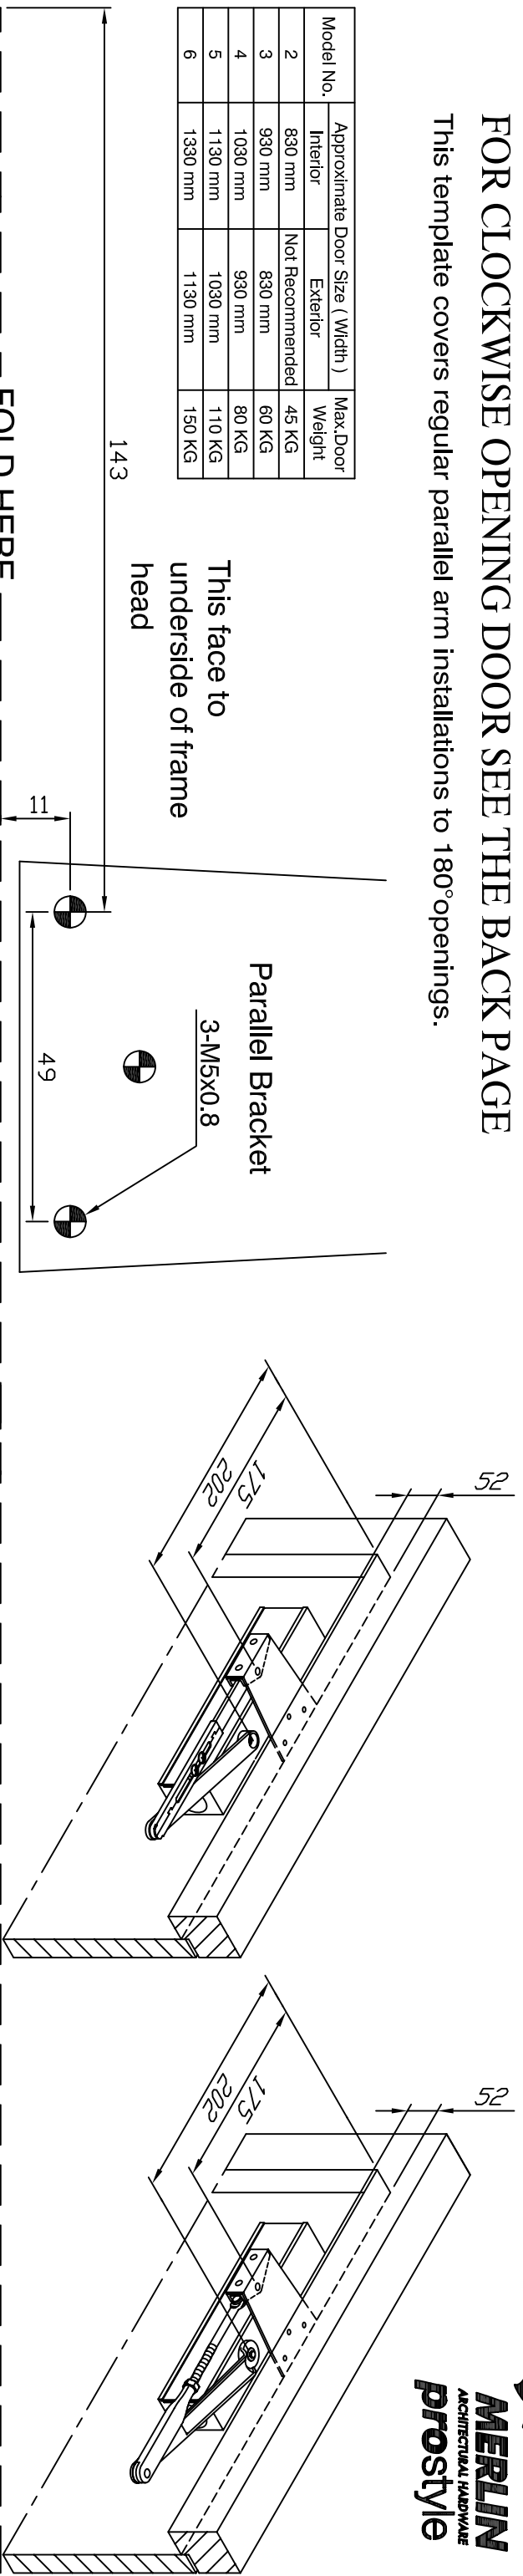

FAST UP
SLOW DOWN
SPEED ADJUSTING VALVE