




## 60.30.01 Grilles 300x300

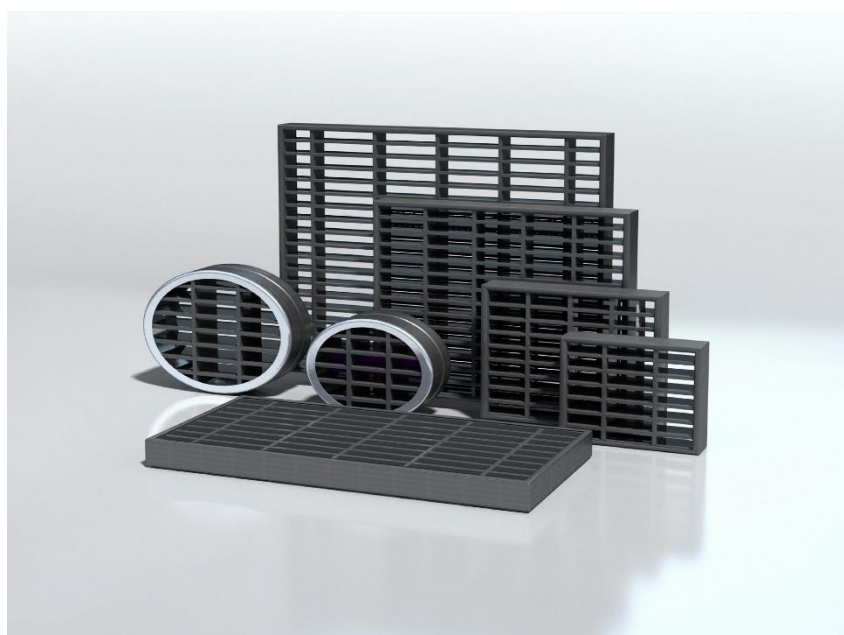

- Tested in flexible walling and ducting to BS476: Part 20: 1987, offering up to 120 minute fire integrity
- Tested in timber doors to BS EN1634-1:2014, offering up to 60 minute fire integrity
- Large range of standard and non-standard sizes available to suit all applications
- Offers approx. 60% free area
- No moving parts therefore no maintenance required
- Slim design; only 38mm thick
- Can be supplied with a wide range of decorative covers if required
- Simple to install in doors, walls and ducts
- Circular sizes to suit standard and non-standard ducting
- Can be supplied complete in duct sections for services applications